

Mini in Stature, Mighty in Manoeuvres

The Kelvin Mini counterbalance forklift is nimble enough to work in 2550mm wide aisles and operate under low ceilings and doorways, whilst still being able to lift large loads. It's perfect for any business size and budget.

Kelvin's reputation for designing and building high-quality, reliable products stretches back to 1969. We've applied all this knowledge and experience into the Kelvin Mini; the ride-on forklift that fits into tight spaces.




1965mm
closed height



Turning radius 1255mm

Product Specification

Product size

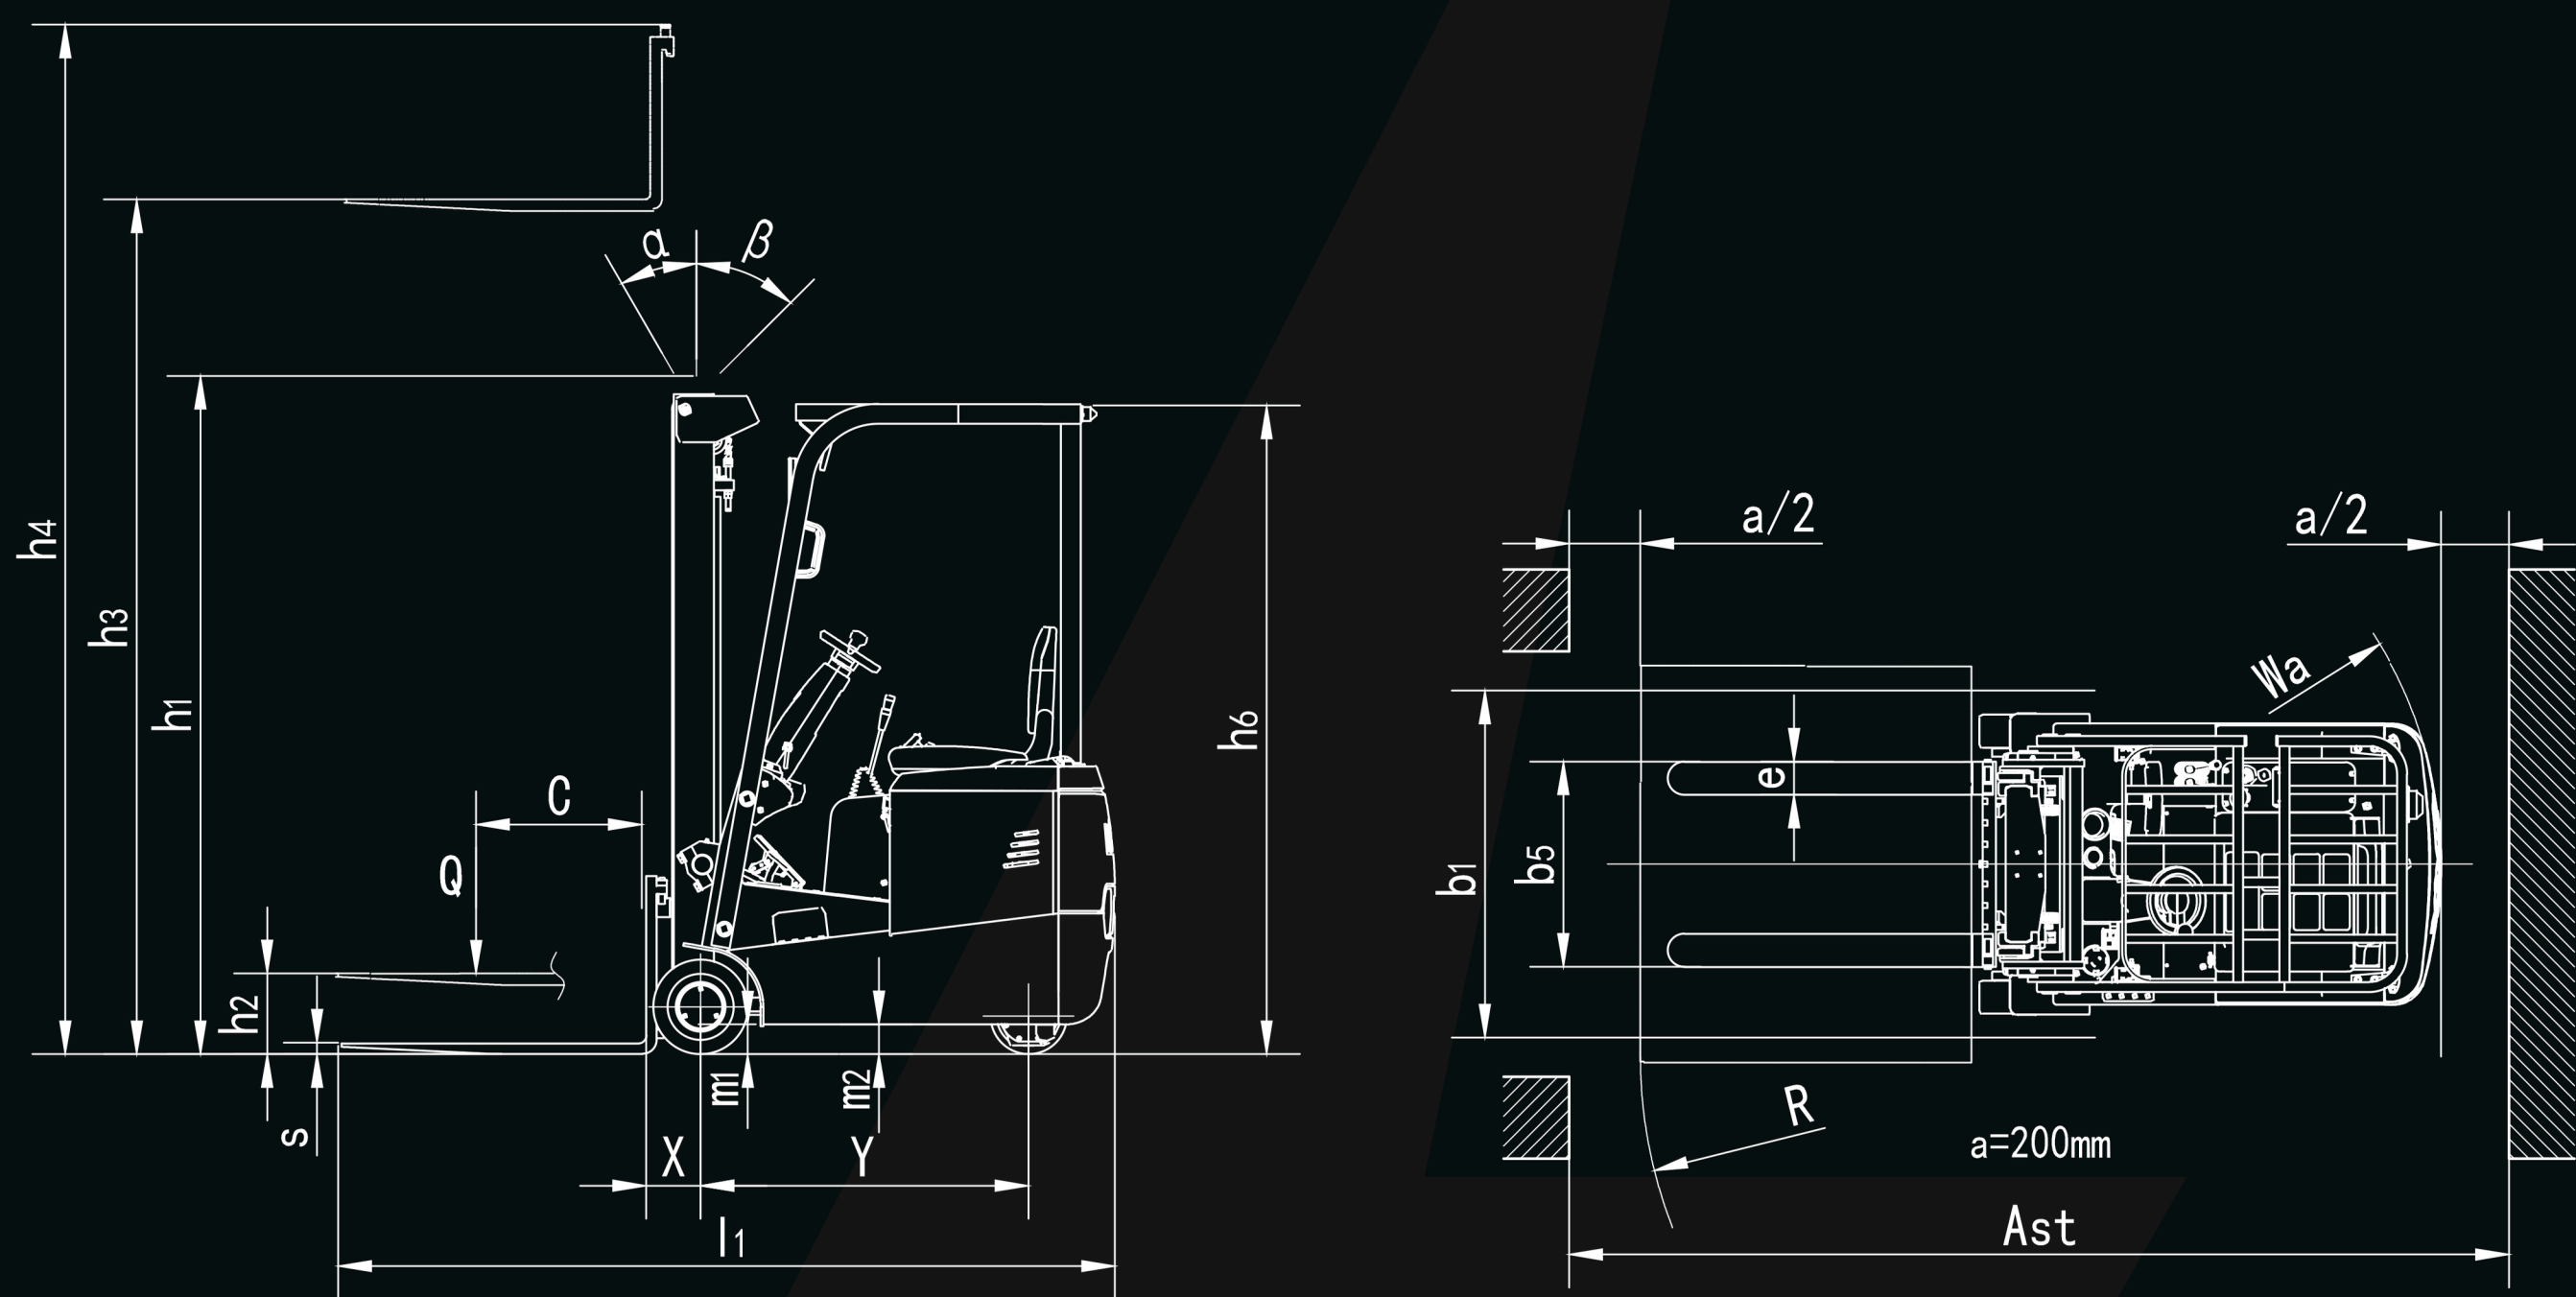

Load Chart

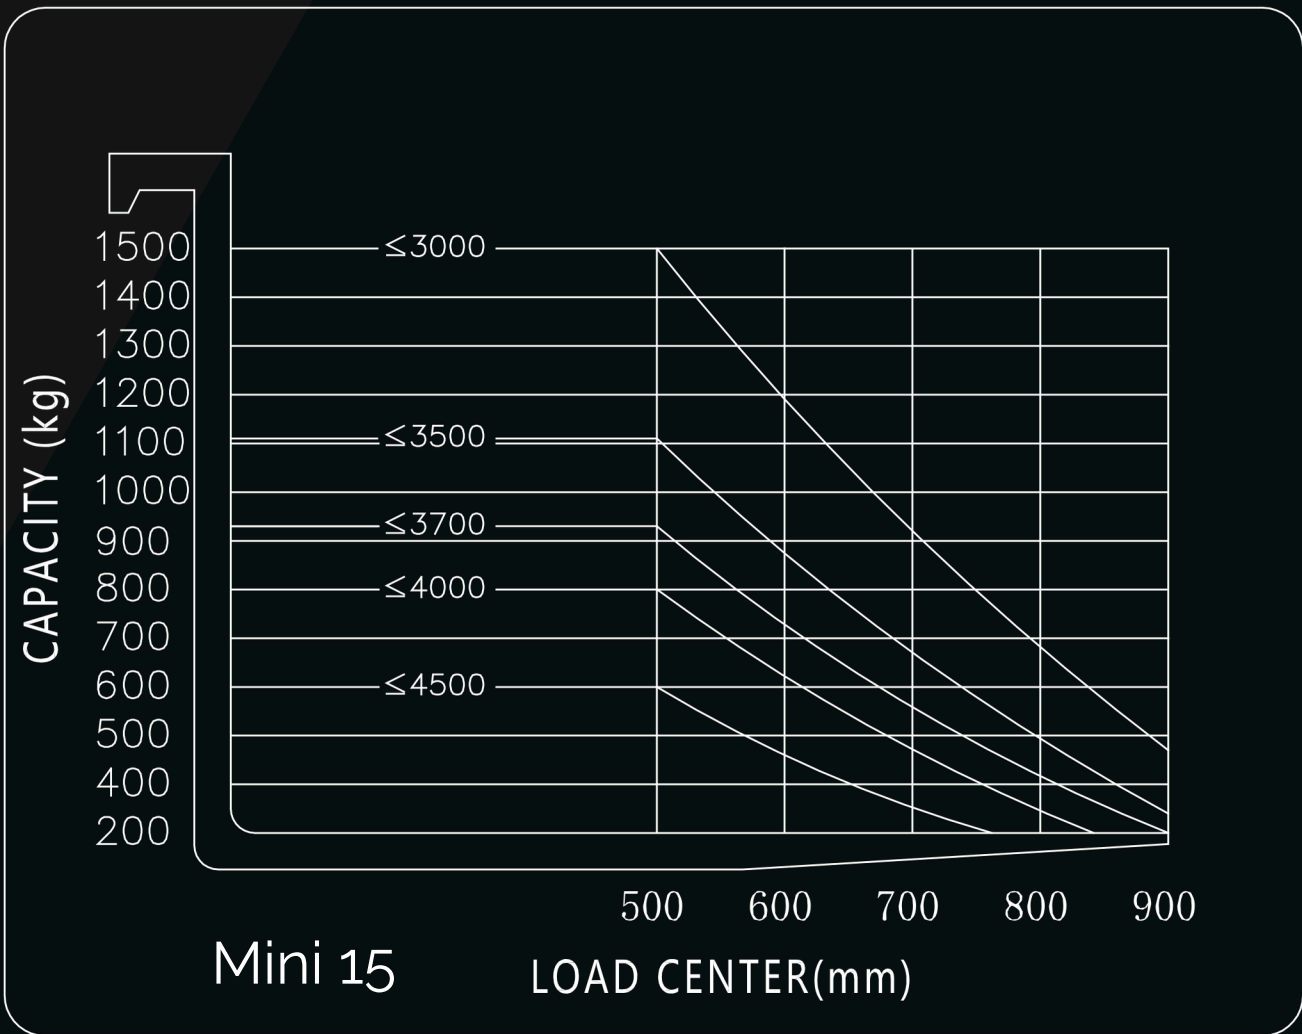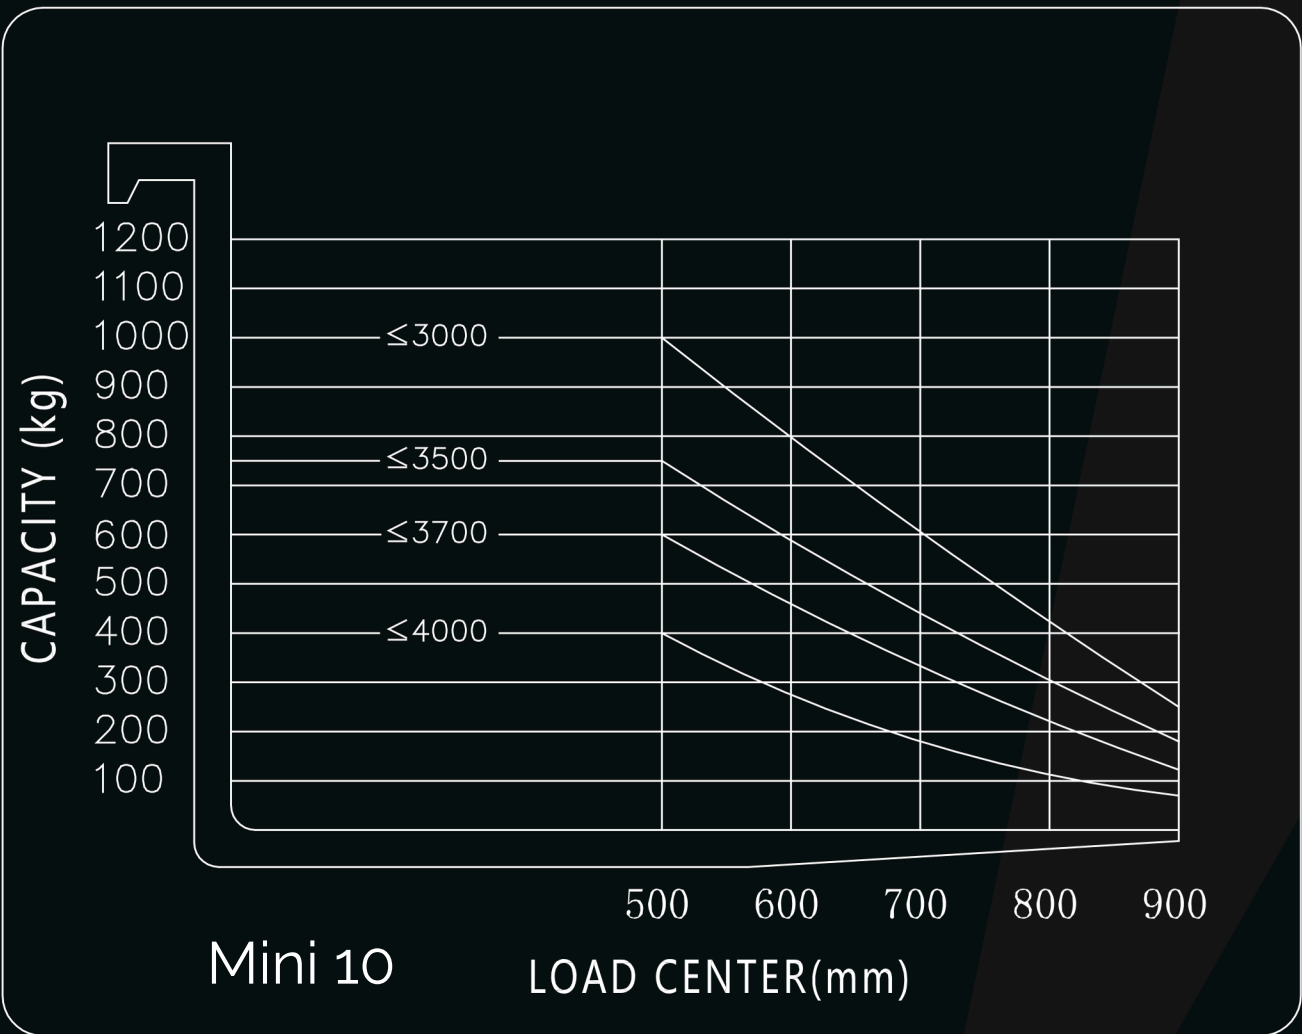

Product Specification

Mast Specification

Duplex Mast									
Model	Mini	10-25	10-27	10-30	10-33	10-35	10-37	10-40	
Lift Height	h3(mm)	2500	2700	3000	3300	3500	3700	4000	
Mast extended height	h4(mm)	3030	3230	3530	3830	4030	4230	4580	
Mast closed height	h1(mm)	1745	1845	1995	2145	2245	2345	2545	
Free lift height	h2(mm)	110	110	110	110	110	110	110	
Model	Mini	15-25	15-27	15-30	15-33	15-35	15-37	15-40	15-45
Lift Height	h3(mm)	2500	2700	3000	3300	3500	3700	4000	4500
Mast extended height	h4(mm)	3060	3260	3560	3860	4060	4260	4560	5060
Mast closed height	h1(mm)	1815	1915	2065	2215	2315	2415	2615	2865
Triplex Mast									
Model	Mini								15-45
Lift Height	h3(mm)								4500
Mast extended height	h4(mm)								5180
Mast closed height	h1(mm)								2100
Free lift height	h2(mm)								/

Suitable for open and closed pallets



IP65 waterproof 3 pin plug type charger included



Mighty Features

Kelvin's reputation for designing and building high-quality, reliable products stretches back to 1969.

We've applied all this knowledge and experience into the Kelvin Mini; the ride-on forklift that fits into tight spaces.



Low closed height

The Kelvin Mini has a closed height of 1965mm

Compact & Manoeuvrable

Allowing for reduced aisle width and confined spaces

Tilt Shift and Side Shift

Delivering extra control and confidence when lifting

Multi-surface Tyres

Tyre options for various indoor and outdoor use

Duplex & Triplex Masts

Safe lifting in limited headroom environments

Safety Features as Standard

Anti roll system-standard. Blue light-standard.

Curve control-standard. Auto fill battery system & blinky-standard

After Sales Service

Full UK engineering coverage. Local service national coverage

Supporting your business nationally.

National service, local coverage.







KELVIN
ENGINEERING

www.forkliftservicesuk.com

sales@forkliftservicesuk.com

Telephone: Sales, Service & Head Office:
01384 422255