

EPT20-A HEAVY DUTY

LITHIUM PALLET TRUCK

24 HOURS
BUILT TO WORK



BUILT TO WORK


24

HOURS

SMART POWERFUL DURABLE

SMART SIZE

ALMOST SAME

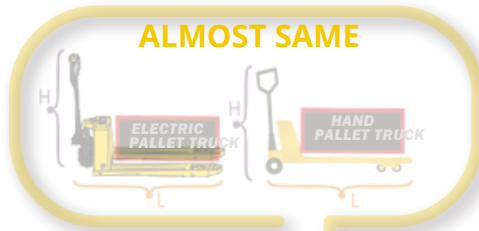

LIGHT WEIGHT




ONLY 25kgs

80 kgs


EFFICIENCY

3 Times Higher Than Manual Pallet Truck

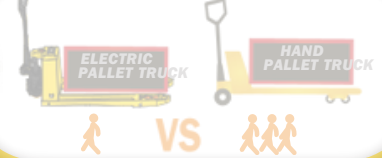


VS

VS

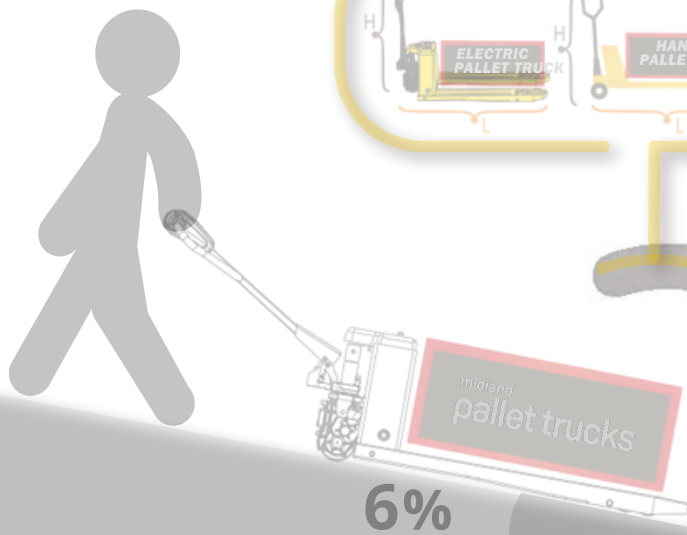

6%

EASY MAINTENANCE

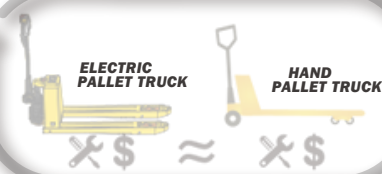

ELECTRIC PALLET TRUCK

HAND PALLET TRUCK

LIFETIME

3 Times Longer Than Manual Pallet Truck



1 PC

VS

3 PCS

HIGH RETURN OF INVESTMENT

Safety

PRODUCTIVE

1 MONTH COST RECOVERY

Optimize your operations
SAVE LABOUR
Release manpower
Brake any time anywhere

Powerful With High Gradeability



Unique brushless technology

Brushless motor, powerful and maintenance free.
Leading in the industry.



1000W power
Brushless motor
Maintenance free



Powered traveling



Powered lifting & lowering

Maintenance free

For brushed motor, carbon brush needs to be replaced every 12 or 18 months.
For EPT15H, no need to replace carbon brush.
Maintenance-free, saving maintenance time and cost.

Powerful with high gradeability

To easily move 1.5 ton or 2 ton over the slopes at warehouse entrances.



Traveling speed

— UNLADEN 4.5km/h
+ LADEN 4km/h



Gradeability



Non-stop Working

6s to replace battery



Maintenance-free lithium battery
It takes only 6s to replace battery.
With a spare battery, the unit can keep working 24 hours.

Short charging time Charge and use freely

Quick charging: 2 hours to fully charge the battery using the optional Quick charger.

Ensured battery safety

Safe and reliable, no fire, no explosion.
Complying with IEC, UL global standard certification requirements, ensuring the safety of user property.

- Long service life: lithium battery with a long service life.
- High safety performance: it adopts soft package battery technology, built-in protection board and multiple protection to eliminate overcharge and overdischarge.
- Maintenance free: no need to add water.



Compact and durable

Solid build, no breaking

Chassis made by solid materials, no bending, no deformation.
Reinforced rocker arm, push rod, wheel frame and support seat.
No plastic part, less damage.

Most compact unit with same lifting capacity

Suitable for small workplaces such as compact workshops, trucks or vans, tail lifts or elevators.
EPT15H has the smallest turning radius among similar products.

Integral forks, no splicing

The forks are uniquely designed, easy to handle European pallets, American pallets and plastic pallets.
Solid fork with no deformation, far more durable than other brands of the same category.

Fork thickness
4mm

V-block thickness
5mm

Top cap thickness
6mm


**Solid build
No breaking**




Intelligent Control

When you're moving heavy loads in tight spaces, maneuverability and controllability are critical to ensure safety, productivity and operator comfort.

The core concept of MIDLAND products is to make them easy to use. With the ergonomically designed handle, EPT15H is easy to operate, reduces fatigue and improves work efficiency. Compared to other brands, users prefer to use MIDLAND products.

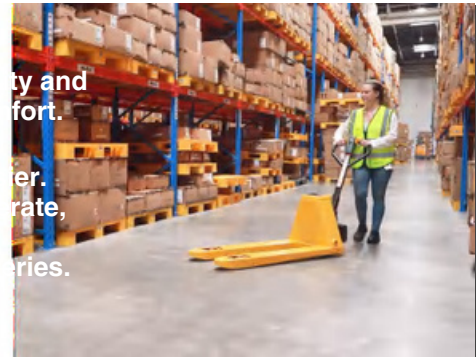

Operator Preferred

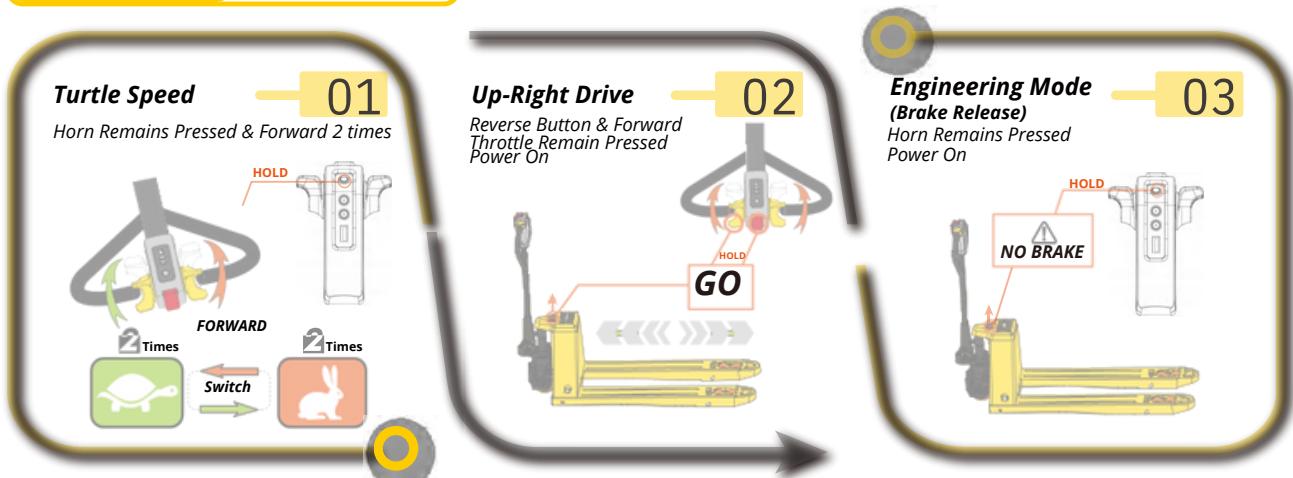

- ⚠ In up-right drive mode, vehicle will move when handle is operated at any position. Please avoid misoperation.
- ⚠ Brake release mode is only for emergencies, not allowed for vehicle with normal conditions.

Comfortable Operation

Easy to operate
Ergonomic handle, comfortable to use.

Leading Technology

CanBus technology is applied on this entry-level electric pallet truck.

Fast And Slow Speed


To match different levels of operator experience, and varied work environments.

Up-right Drive Mode

Convenient to operate in vans, on tail lifts, or inside elevators.

Engineering Mode

When the unit breaks down, it can be moved away manually.

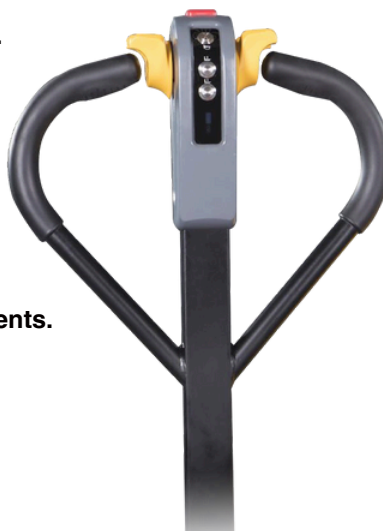

- Recharge alert**
- Hour meter**
- Powered traveling**
- Powered lifting & lowering**
- Error code display**
- Emergency stop button**
- Horn**

Slope anti-sliding design

Easy parking on slopes, preventing accidental backing of the machine.


Easy Maintenance

EPT series utilizes MIDLAND's integrated diagnostics, **Easy parts replacement** program to facilitate quick problem resolution, reducing machine downtime and operating costs.


- **1 minute**
Replace the drive wheel
- **1 minute**
Replace the handle
- **2 minutes**
Remove the controller
- **3 minutes**
Remove the motor



Error Code Display
Quickly identify the fault during operation.

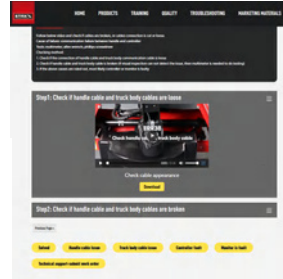


Specialized service website & mini-program
Users can identify the fault based on the online troubleshooting videos. No limit on time, no limit on location. Easy access to the most professional solution to all possible truck failures.



Professional after-sales support
Specialist guidance is a phone call away.

Ready to Handle Multiple Jobs

With its unique design, EPT series is powerful and maneuverable to meet the application in a wide range of working conditions.

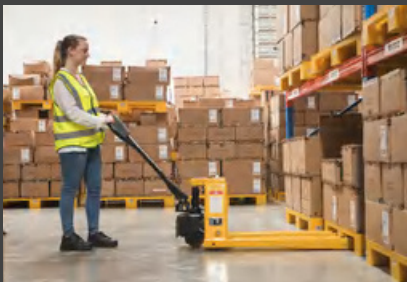

Warehouses/Logistics center



Truck tail lift



Supermarket

Pallet trucks are a necessary investment. Choosing the wrong machine could cause loss in productivity, high cost of machine downtime, unhappy workers, and overall, increased running costs. Choosing EPT series will reward you with long-term value.

MIDLAND EPT Series

- **Powerful**
- **Durable**
- **Easy maintenance**
- **Low use cost**
- **High return on investment**

Basic Configuration


EPT20-A

PPT20-A

- Horn
- Emergency reverse button
- Forward/reverse switch
- Lifting / Lowering LCD Screen
- Battery indicator with hour meter
- Error code display
- Recharge alert



Multi-function Handle (Full Electric)



Multi-function Ergonomic Handle (Semi-electric)



Tandem/Single PU wheel



Lithium Battery



Protection cover
Protect the drive motor,
Anti-foot stamping



Intelligent charger

EPT20-A





Electric lifting/lowering

PPT20-A



Manual lifting/lowering

Dimensions

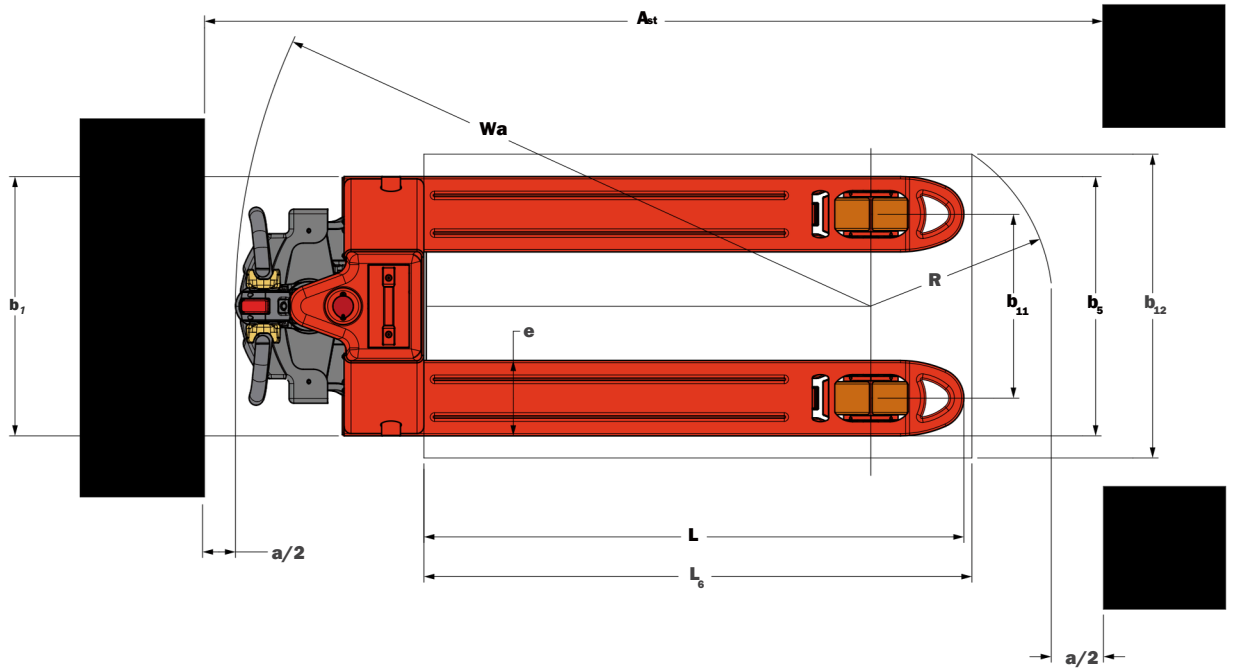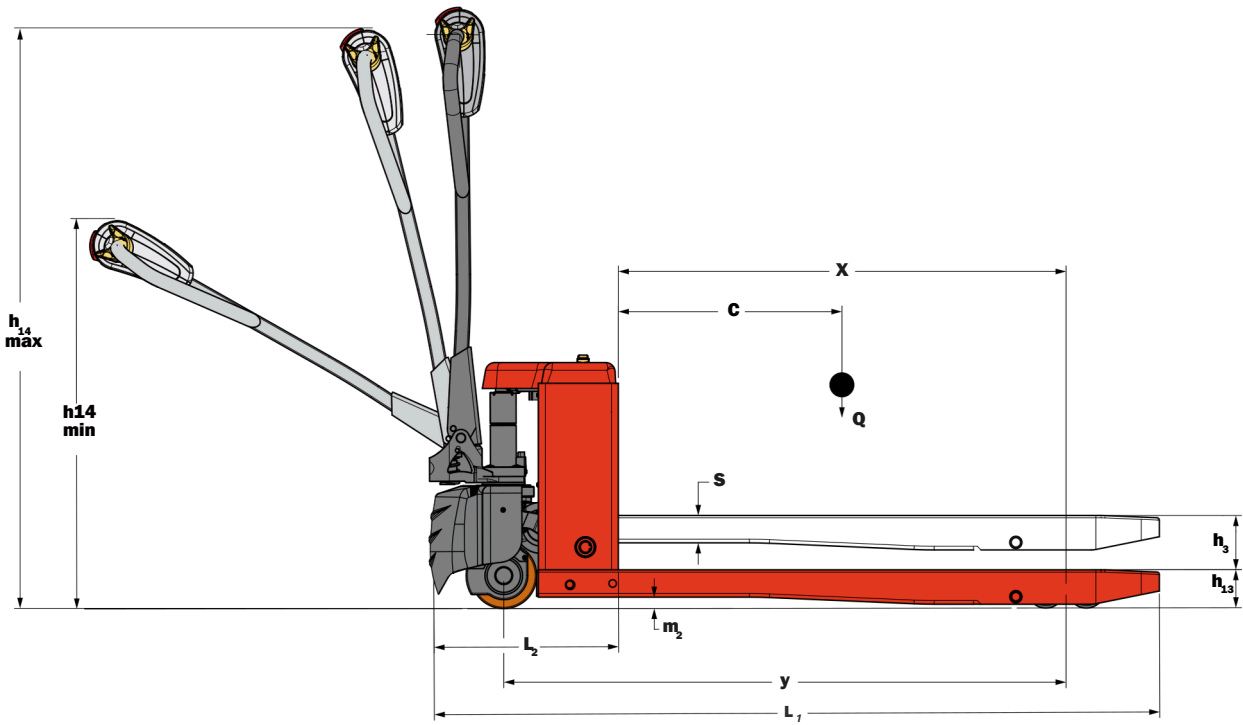

Specifications

MODEL		PPT20H	EPT15H	EPT20-A	EPT15H-65L
CHARACTERISTICS					
1.1	Drive		Electric	Electric	Electric
1.2	Operator type		Pedestrian	Pedestrian	Pedestrian
1.3	Load capacity/rated load	Q kg	2000	1500	2000
1.4	Load centre	C mm	600	600	600
1.5	Height, fork lowered	h13 mm	82 ± 2	82 ± 2	82 ± 2
1.6	Wheelbase	y mm	1197/1267	1197/1267	1197/1267
1.7	Wheel		PU	PU	PU
1.8	Wheel size, front	m	140*55	140*55	140*55
1.9	Wheel size, rear	m	80*93 (Single Wheel)	80*93 (Single Wheel)	80*70 (Tandem)
		m	80*70 (Tandem)	80*70 (Tandem)	60*70 (Tandem)
1.10	Wheels, number front/rear (x = drive wheels)	m	1x+2/4	1x+2/4	1x+2/4
1.11	Lift	h3 mm	195	195	195
1.12	Height of tiller in drive position, min./max.	h14 mm	740/1220	735/1170	735/1170
1.13	Overall length	L1 mm	1552/1622	1552/1622	1552
1.14	Fork Length	L mm	1150/1220	1150/1220	1150
1.15	Overall width	b1 mm	550/685	550/685	550
1.16	Fork dimensions	mm	58/160/1150(1220)	58/160/1150(1220)	58/160/1150
1.17	Overall fork-arms Width	b2 mm	550/685	550/685	550
1.18	Ground clearance, centre of wheelbase	m2 mm	22/137(24/139)	22/137(24/139)	22/137
1.19	Aisle width for pallets 1000x1200 crossways	Ast mm	2155/2226	2155/2226	2155/2226
1.20	Aisle width for pallets 800x1200 lengthways	Ast mm	2024/2064	2024/2064	2024/2064
1.21	Turning radius	Wamm	1353/1426	1353/1426	1353
PERFORMANCE					
2.1	Travel speed, laden/unladen	km/h	4.0/4.5	4.0/4.5	4.0/4.5
2.2	Lifting speed, laden/unladen	mm/s	/	18/23	18/23
2.3	Lowering speed, laden/unladen	mm/s	/	56/46	56/46
2.4	Max. gradeability, laden/unladen	%	6%/20%	6%/20%	6%/20%
2.5	Drive motor	kW	DC 1.0 Brushless	DC 0.75 Brushless	DC 1.0 Brushless
2.6	Lift motor	kW	Hydraulic	DC 0.8	DC 0.8
BATTERY					
3.1	Battery voltage/nominal capacity	V/Ah	48V/10Ah	48V/10Ah	48V/10Ah
3.2	Traveling brake		Regenerate	Regenerate	Regenerate
3.3	Brake		Electromagnetic	Electromagnetic	Electromagnetic
3.4	Sound level at the driver's ear according to EN 12053	A	<70dB	<70dB	<70dB
3.5	Service weight including battery	kg	117/123.5	116.5/123	119/125.5

MAKE
YOUR JOB
EASIER!

